



INTRODUCING THE V-21 SERIES



INCREASE PROFITS WITH V-21

V-21 offers fast setup — Changing columns from bottles to cans has never been easier.

No wires, no spacers, no gauge bars, no gauge bar clips and no cams to adjust.

Simply move the back spacer, adjust the product slide and select the appropriate depth setting!

For additional fine-tuning of product setup, the vend mechanisms are self-priming.

Vend mechanism, at stand-by, has built-in anti-theft features.

Product Slide in Can Position



Product Slide in Bottle Position




NOTE: This is a demonstration model for photographic purposes only. It is not an actual "V-21" column.




| V-21 MODEL NUMBER | 601 | 701 | 601 |
|-------------------------------|---------------------|----------------------|----------------------|
| Total Can Capacity | 544 | 680 | 800 |
| Selections/Columns | 4 | 10 | 10 |
| Dimensions - H x W x D | | | |
| Curved Front | N/A | 72" x 39.5" x 34.75" | 78" x 39.5" x 34.75" |
| Flat Front | 72" x 32.5" x 31.5" | 72" x 39.5" x 31.5" | N/A |
| 8000 - 8000R | N/A | 72" x 39.5" x 31.5" | N/A |
| Live Display - Curved Front | N/A | 72" x 39.5" x 34.75" | N/A |
| Live Display - Flat Front | 72" x 32.5" x 31.5" | 72" x 39.5" x 31.5" | N/A |
| Shipping Weight* | 600 lb | 650 lb | 710 lb |
| Capacity per Column | | | |
| 12oz. can | 68 | 68 | 80 |
| 16oz. glass | 30 | 30 | 36 |
| 20oz. PET** | 30 | 30 | 36 |

* Dimensional and shipping weight will vary slightly due to manufacturing tolerances, shipping loads, and whether or not signage is installed.
 ** 20oz. PET capacity may vary based on the shape and size of bottle.

INSIDE THE V-21

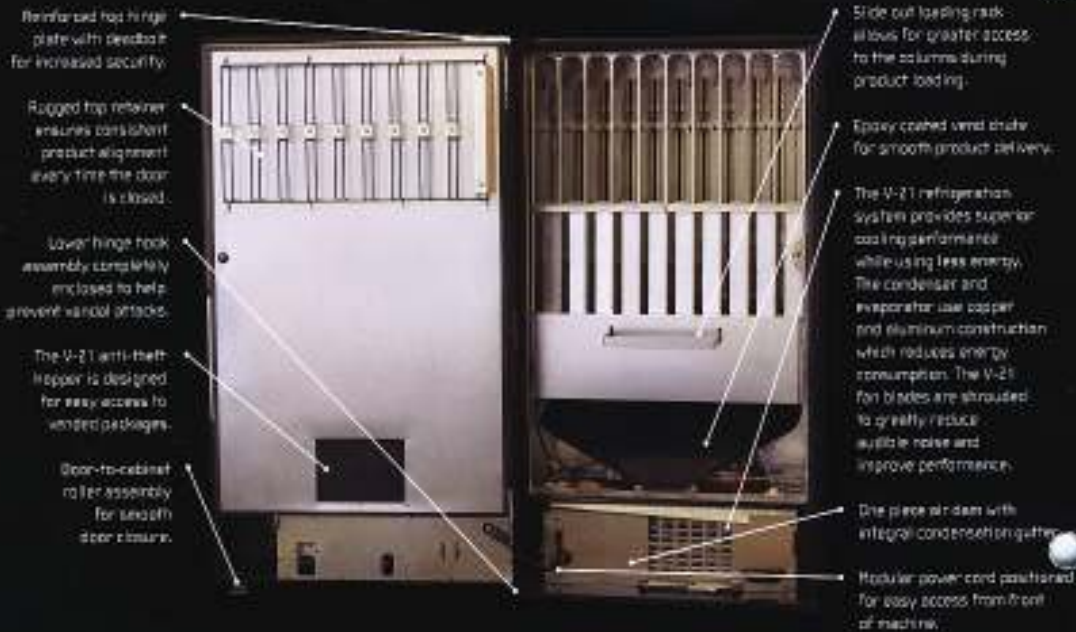

| | V-21 Hopper | V-21 Controller | Energy Consumption | | | | | | | | | | | | |
|--|---|---|---|------------|----------------|-----------|---------------|----------|---------------|------------|----------------|-----------|---------------|----------|---------------|
| <p>The V-21 product delivery system ensures reliable vending by being less sensitive to package diameter, shape and firmness (carbonation).</p> <p>The V-21 stack allows maximum flexibility for product loading. Product can be loaded caps to back, built-to-back or in combination to optimize vending reliability.</p> |  <p>24 volt, DC motor. No micro switches. No timing cams. Motors installed with only 2 screws.</p> | <p>Full function PCB controller with BEXUS compatibility.</p> <p>Energy management features included as standard:</p> <ul style="list-style-type: none"> • Real Time Clock • Lighting Control • Refrigeration Control <p>Diagnostic LEDs for vend sensor status.</p> | <p>With a 374 watt vending machine with comparable styling.</p> <p>Standard Trade Package</p> <table border="1"> <tr> <td>Compressor</td> <td>11.2 kWh/24hrs</td> </tr> <tr> <td>Condenser</td> <td>1.7 kWh/24hrs</td> </tr> <tr> <td>Vent Fan</td> <td>0.2 kWh/24hrs</td> </tr> </table> <p>Low Quality Trade Package</p> <table border="1"> <tr> <td>Compressor</td> <td>13.1 kWh/24hrs</td> </tr> <tr> <td>Condenser</td> <td>0.8 kWh/24hrs</td> </tr> <tr> <td>Vent Fan</td> <td>0.2 kWh/24hrs</td> </tr> </table> <p>Data available from California Energy Commission - 2009. All vending machines tested per ANSI/ISO 1 Standard.</p> | Compressor | 11.2 kWh/24hrs | Condenser | 1.7 kWh/24hrs | Vent Fan | 0.2 kWh/24hrs | Compressor | 13.1 kWh/24hrs | Condenser | 0.8 kWh/24hrs | Vent Fan | 0.2 kWh/24hrs |
| Compressor | 11.2 kWh/24hrs | | | | | | | | | | | | | | |
| Condenser | 1.7 kWh/24hrs | | | | | | | | | | | | | | |
| Vent Fan | 0.2 kWh/24hrs | | | | | | | | | | | | | | |
| Compressor | 13.1 kWh/24hrs | | | | | | | | | | | | | | |
| Condenser | 0.8 kWh/24hrs | | | | | | | | | | | | | | |
| Vent Fan | 0.2 kWh/24hrs | | | | | | | | | | | | | | |



BRING YOUR PRODUCT TO LIFE WITH V-21 LIVE DISPLAY



The Vendo Company offers a complete line of parts, accessories, supplies and add-on security devices — call for information.

Attractive, well-lit product display for maximum customer appeal.

Conveniently located selection buttons make the machine user-friendly.

Selection buttons display ready-to-serve and sold-out lights, informing customers about vendible product availability.

Individual pricing label area directly below each displayed product for instant price recognition.

Change graphics in minutes with easy slide-in slide-out design.

Graphic insert is designed so that custom details can be applied right over existing pictures.

Product display area is easy to clean.

Dark disconnects of selection buttons and lights for fast servicing.

Designed for easy card reader installation.

Lower 1/3 metal panel for security and stability (flat front only).

T-8 lighting with electronic ballast.



The Vendo Company
7070 N. Highway Ave., Fresno, CA 93652
T 503 439 1170 F 503 439 2025
T 800 344 7215 F 800 341 9494
www.vendo.com